

---

**ACCESSORY POWER™**

# **LightLINK™**



## **INSTRUCTION MANUAL**

---

### **FREE PRODUCT REGISTRATION**

Protect your investment and take advantage of this free product warranty.

**YOU MUST REGISTER WITHIN 30 DAYS**

of purchase to receive full warranty coverage and access to special offers.

**[www.AccessoryPower.com/warranty](http://www.AccessoryPower.com/warranty)**

---

**Thank you** for purchasing the **Accessory Power LightLINK LED Camera Light**. This convenient, quick set-up LED camera light provides bright illumination wherever you need it! With an innovative, interlocking design, you can customize your lighting infinitely! Its compact size and removable, rechargeable battery design offers easy portability and up to one hour of continuous light per charge.


### What's in the box?

- a - LightLINK camera light
- b - Universal mounting bracket
- c - OL40B Li-Ion battery
- d - AC charger



### Product Diagram

- 1 - LED bulbs
- 2 - ON/OFF switch
- 3 - Rechargeable battery compartment
- 4 - Rechargeable battery compartment door
- 5 - Flip-down AC plug
- 6 - Battery charger LED
- 7 - Hot shoe foot
- 8 - Hot shoe collar
- 9 - Tripod socket mounting screw
- 10 - Bracket hot shoe mount
- 11 - LightLINK expansion slots

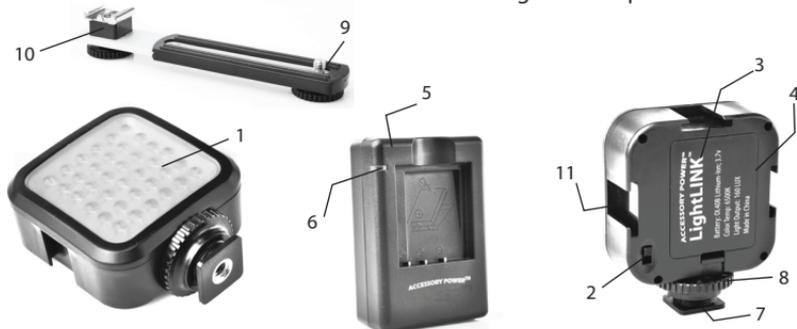

## Operating Instructions:

### Attaching to your camera

The **LightLINK** can be attached to your camera via your camera's hot shoe, or by the *(b) Universal mounting bracket* that attaches to the tripod socket of your camera.

### Attaching the LightLINK to your camera's hot shoe mount

First, loosen the *(8) Hot shoe collar* so that the **LightLINK** can be connected to your camera's hot shoe. Insert the *(7) Hot shoe foot* into the hot shoe on your camera with the *(1) LED bulbs* facing forward. Once the *(7) Hot shoe foot* is inserted into your camera's hot shoe, tighten the *(8) Hot shoe collar* by turning clockwise until the *(a) LightLINK camera light* is locked firmly into place.

### Attaching the LightLINK to your camera with the *(b) Universal mounting bracket*

Adjust the orientation of the *(b) Universal mounting bracket* and *(9) tripod socket mounting screw* to fit the needs of your specific camera model. Connect the *(9) Tripod socket mounting screw* to the tripod socket on your camera by inserting and tightening until the bracket is secure. Loosen the *(8) Hot shoe collar*. Insert the *(7) Hot shoe foot* into the *(10) Bracket hot shoe mount* with the *(1) LED bulbs* facing forward. Once the *(7) Hot shoe foot* is inserted, tighten the *(8) Hot shoe collar* by turning clockwise until the *(a) LightLINK camera light* is locked firmly into place.



## Operating Instructions (*continued*):

### Inserting the battery

Locate the (3) *Rechargeable battery compartment* on the back of the (a) *LightLINK camera light*. Open the (4) *Rechargeable battery compartment door* and insert the (c) *OL40B Li-Ion battery* so that the (+/-) battery contacts are in line with the (+/-) metal contacts inside the (3) *Rechargeable battery compartment*. Then, close the (4) *Rechargeable battery compartment door*. To illuminate the (1) LED bulbs, locate the (2) *On/Off switch* on the back of the (a) *LightLINK camera light* and switch it to the ON position.

### Recharging the battery

Remove the (4) *Rechargeable battery compartment door* and take out the (c) *OL40B Li-Ion battery*. Insert the (c) *OL40B Li-Ion battery* in to the (d) *AC charger* so that the (+/-) battery contacts are in line with the charger contacts. Pull out the (5) *Flip-down AC plug* and plug the charger in to your wall outlet. When the (d) *AC charger* is charging the (6) *Battery charger LED* will glow RED. When the charge is complete the (6) *Battery charger LED* will glow GREEN and then turn off.

### Using the (12) LightLINK expansion slots

You can expand your (a) *LightLINK camera light* with additional units to make different lighting configurations. To expand your (a) *LightLINK camera light*, connect additional units by inserting their (7) *Hot shoe foot* into one of the three (11) *LightLINK expansion slots* with the (8) *Hot shoe collar* loose and the (1) *LED bulbs* facing forward. Once the (7) *Hot shoe foot* is inserted into the (11) *LightLINK expansion slot*, tighten the (8) *Hot shoe collar* by turning clockwise until the (a) *LightLINK camera light* is locked firmly into place.

## Troubleshooting

### **The (a) LED camera light does not turn on.**

Make sure that your battery contacts are in line with the (3) *Rechargeable battery compartment* and that the (c) *OL40B Li-Ion battery* is fully charged.

### **The (6) Battery charger LED lights are not glowing.**

Make sure that your (c) *OL40B Li-Ion battery contacts* are properly connected to the (d) *AC charger* and that the outlet is in proper working condition.

### **My LightLINK won't fit in the hot shoe or (11) LightLINK expansion slots.**

Make sure when you are inserting the (7) *Hot shoe foot* into the hot shoe on your camera or the (11) *LightLINK expansion slots* that the (8) *Hot shoe collar* is loosened by turning it counterclockwise.

## Cautions

- Please only use this product in the manner described in this manual.
- Please keep out of the reach of children.
- Please do not stare at the LED bulbs.

## Product Specifications

Operating voltage: DC 3.7V

Power dissipation: 4W

Color temperature: 6500K

Light output: 160 LUX

Beam angle: 65°;

Color rendering properties: ≥85%

Average life: 30000H

Dimensions: 6.7 x 3.75 x 1 inches (170.18 x 95.25 x 25.4 mm)

Weight: 4.26 oz (121 g)

Certifications: RoHS, SGS, CE



Learn more about this and other  
quality Accessory Power products



[www.AccessoryPower.com](http://www.AccessoryPower.com)



[Facebook.com/AccessoryPower](https://www.facebook.com/AccessoryPower)



[Twitter.com/AccessoryPower](https://twitter.com/AccessoryPower)

**For more on this product  
+ tips and tricks please visit  
[AccessoryPower.com/videos](http://AccessoryPower.com/videos)**



ACCESSORY POWER  
WESTLAKE VILLAGE, CALIFORNIA

[WWW.ACCESSORYPOWER.COM](http://WWW.ACCESSORYPOWER.COM)  
MADE IN CHINA

©2010 ACCESSORY POWER

All trademarks and brand names are the property of their owners



*Please Always Recycle*